

Inquiry form for the SKG-service lift ISO-U

Swing door serving at floor level with add. floor flap according to EN81-3 and Machine Directive 2006/42/EC

See catalogue SKG „Service lifts“, pages 52 to 53

PROJECT

Client: _____

Project: _____

Date: _____ Request: _____

GENERAL

Capacity: 300 kg Safety gear: No

Chargement: Front-loading Through-loading

Position of machine room: side below

Number of stops: _____ Number of landings: _____ Floor markings: _____

Power supply: 3 x 400 V 50 Hz 3 x 380 V 50 Hz 3 x 230 V 50 Hz

Others: _____

Shaft (Floor to floor distances see in supplement for floor to floor distances)

Width: _____ mm Depth: _____ mm Travel: _____ mm Headroom: _____ mm Pit: _____ mm

Cabin

Width: _____ mm Depth: _____ mm Height: _____ mm

FINISHES

Cabin

Landing doors

- Gavanized
- Primed painted **RAL 7032**
- Stainless steel 1.4016 (AISI 430) brushed grain K240
- Stainless steel 1.4301 (AISI 304) brushed grain K240
- Stainless steel 1.4301 (AISI 304) 5WL
- Stainless steel 1.4571 (AISI 316Ti) brushed grain K240


Other finishes: _____

RAL _____

RAL _____


Galvanized with powder coating, following RAL colours are available:

RAL 3000	RAL 5010	RAL 7016	RAL 7035	RAL 9005	RAL 9010	RAL 9016
----------	----------	----------	----------	----------	----------	----------

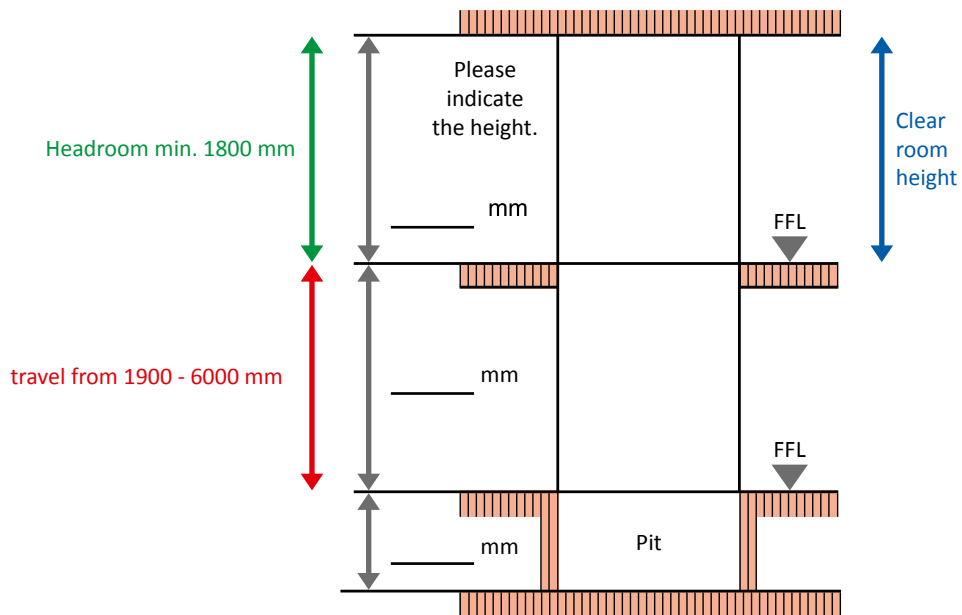

Please check the floors.

1 2

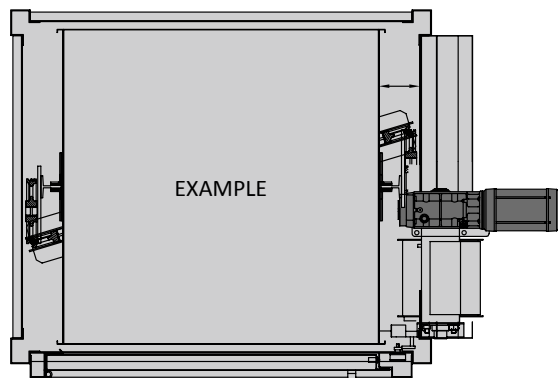

1 2

Please check the floors.

Inquiry form for the SKG-service lift ISO-U

Swing door serving at floor level with add. floor flap according to EN81-3 and Machine Directive 2006/42/EC

OPTIONS

Cabin

Lightning: Yes No

Cabin protection: Baffle plates Drop bar

Attention: Possibly, the clear cabin dimensions and / or the shaft dimensions are changing!

Landing doors

Double walls: Yes additionally with mineral wool

Fire certificate: EN81-58 E120 EW60/EW30 EN81-58 EI60

Safety lock: with profile cylinder with KABA cylinder (for Switzerland only)

Other equipment: