

Inquiry form for the SKG-service lift **ISO-PE EASY 750/1000**

Goods lift with one accompanying person / Swing doors serving at floor level according to type examination and Machine Directive 2006/42/EC

See catalogue SKG „Service lifts“, pages 80 to 81 and 84 to 85

PROJECT

Client: _____

Project: _____

Date: _____ Request: _____

GENERAL

Capacity: 750 kg 1000 kg Safety gear: Yes

Chargement: Front-loading Through-loading

Position of machine room: on top

Number of stops: _____ Number of landings: _____ Floor markings: _____

Power supply: 3 x 400 V 50 Hz 3 x 380 V 50 Hz 3 x 230 V 50 Hz

Others: _____

Shaft (Floor to floor distances see in supplement for floor to floor distances)

Width: _____ mm Depth: _____ mm Travel: _____ mm Headroom: _____ mm Pit: _____ mm

Cabin

Width: _____ mm Depth: _____ mm Height: _____ mm


FINISHES

	Cabin	Landing doors	Machine room door
Gavanized	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Stainless steel 1.4016 (AISI 430) brushed grain K240	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Stainless steel 1.4301 (AISI 304) brushed grain K240	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Stainless steel 1.4301 (AISI 304) 5WL	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Stainless steel 1.4571 (AISI 316Ti) brushed grain K240	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

Other finishes: _____

Inquiry form for the SKG-service lift ISO-PE EASY 750/1000

Goods lift with one accompanying person / Swing doors serving at floor level according to type examination and Machine Directive 2006/42/EC

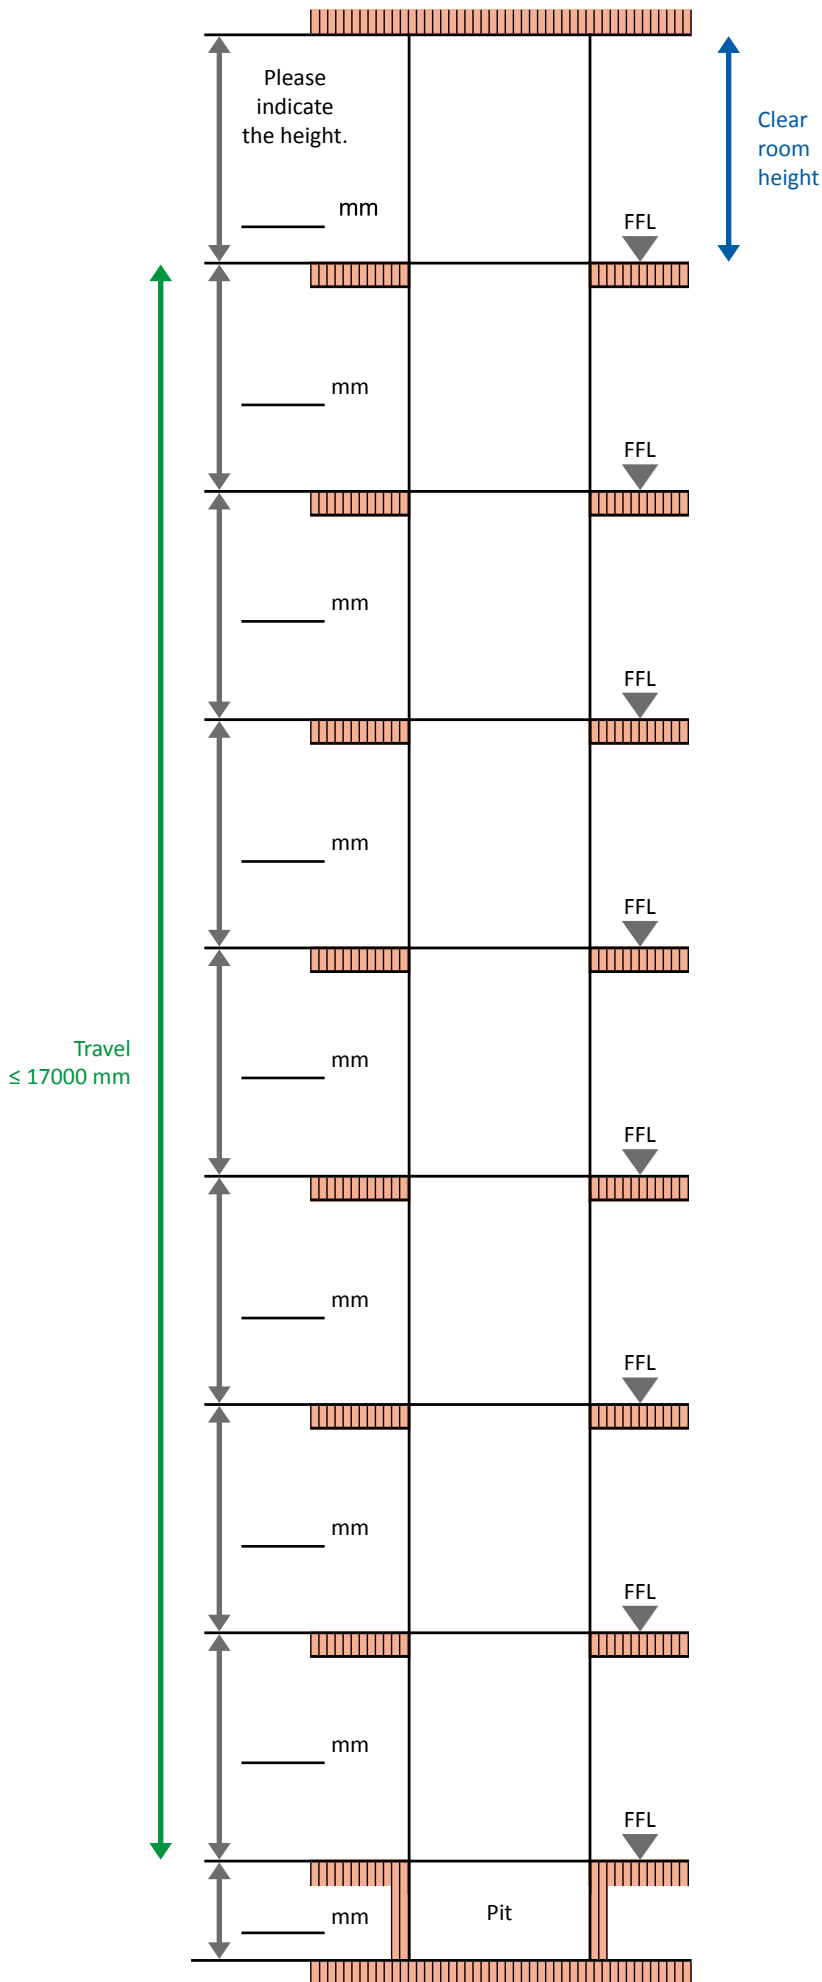

Please check the floors.

1 2 3 4 5 6 7 8

A cross-sectional diagram of the lift car, showing its internal structure and the location of the doors. The word "EXAMPLE" is written in the center of the car's interior. The diagram is flanked by vertical lines representing the shaft walls.

1 2 3 4 5 6 7 8

Please check the floors.

Inquiry form for the SKG-service lift **ISO-PE EASY 750/1000**

Goods lift with one accompanying person / Swing doors serving at floor level according to type examination and Machine Directive 2006/42/EC

OPTIONS

Shaft

Ladder: Yes with anti-theft device

Lightning: Yes No

Landing doors

Fire certificate: EN81-58 E120 EW60/EW30 EN81-58 EI60 (only at door with ≤ 1000 mm)

Machine room door

Double walls: Yes additionally with mineral wool

Fire certificate: EN81-58 E120 EW60 EN81-58 EI60 (only at door with ≤ 1000 mm)

Safety lock: with profile cylinder with KABA cylinder (for Switzerland only)

Electrical:

Lockable push button stations: with profile cylinder with KABA cylinder (for Switzerland only)

Other equipment: